


INTRODUCING THE MELTCATOR!

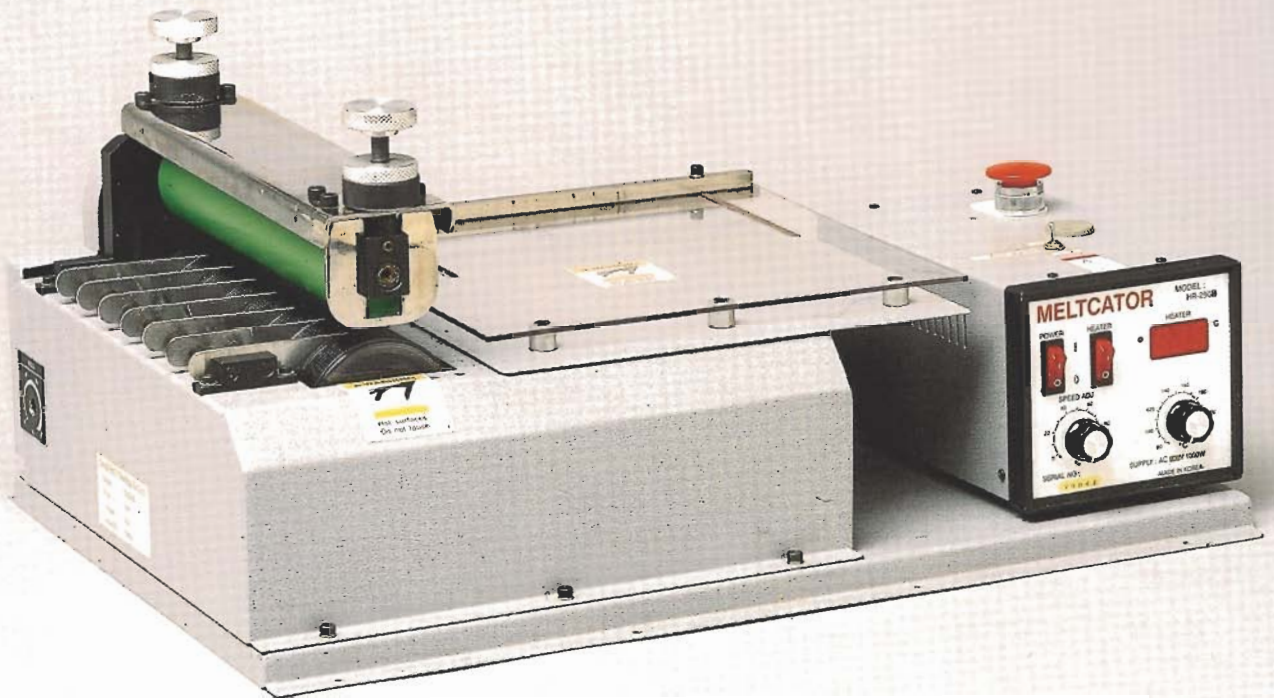

HOT MELT ROLL COATER

The MELTCATOR is a new hot melt roll coater from Gluefast, a leader in roll coaters for more than 50 years! The new model HR-250 features heavy duty construction and quality workmanship for years of operation.

The HR-250 can be configured with the optional Pressure Bar Attachment for full or edge gluing as pictured above (model HR-250S) or for very thick materials the Pressure Bar Attachment can be removed. The machine can also be ordered without the Pressure Bar Attachment (Model HR250B).

Standard Features Include:

- Easy, safe and simple operation
 1. Turn heater switch on
 2. When correct temperature is reached turn on motor switch.
- Easy adjustment of glue thickness
- Large covered glue pot
- 10" Wide corduroy pattern glue roller
- Motor Lock-out when hot melt is not molten
- Variable Speed Motor
- Microprocessor based temperature controller

The MELTCATOR Specifications

Roller Width	10 Inches (18 inch roller unit available on special order - contact Gluefast for details)
Roller Type	Corduroy (striped) pattern
Electrical	120 Volts, 60 Hz, Single Phase
Power Consumption	Heater - 1000 watts DC Motor - 24 watts
Temperature Control Range	175°F to 430°F (80°C to 220°C)
Glue Reservoir Volume	Approx. 3 quarts (2.5 liters)
Warm Up Time	Approx. 20-30 minutes
Safety Features	Motor lock-out when hot melt is not molten Well insulated cover Drive roller and gear covered Emergency Stop Button Auto-reverse feature when Emergency Stop Button is pushed.
Weight	Approximately 82 pounds (37 kg)
Options	Knurled roller for 100% adhesive coverage Pressure Bar Attachment (can be added to standard model HR-250B)

Ordering Information

- Standard MELTCATOR Model HR-250B, part #MCTR-250B
- Meltcator Model HR-250S with Pressure Bar Attachment, part #MCTR-250S