


# THE LEADER IN ADHESIVE COATING MACHINES IS THE **POTDEVIN NTZ** FOR PRECISE COATING ON MATERIALS UP TO 1/2" THICK

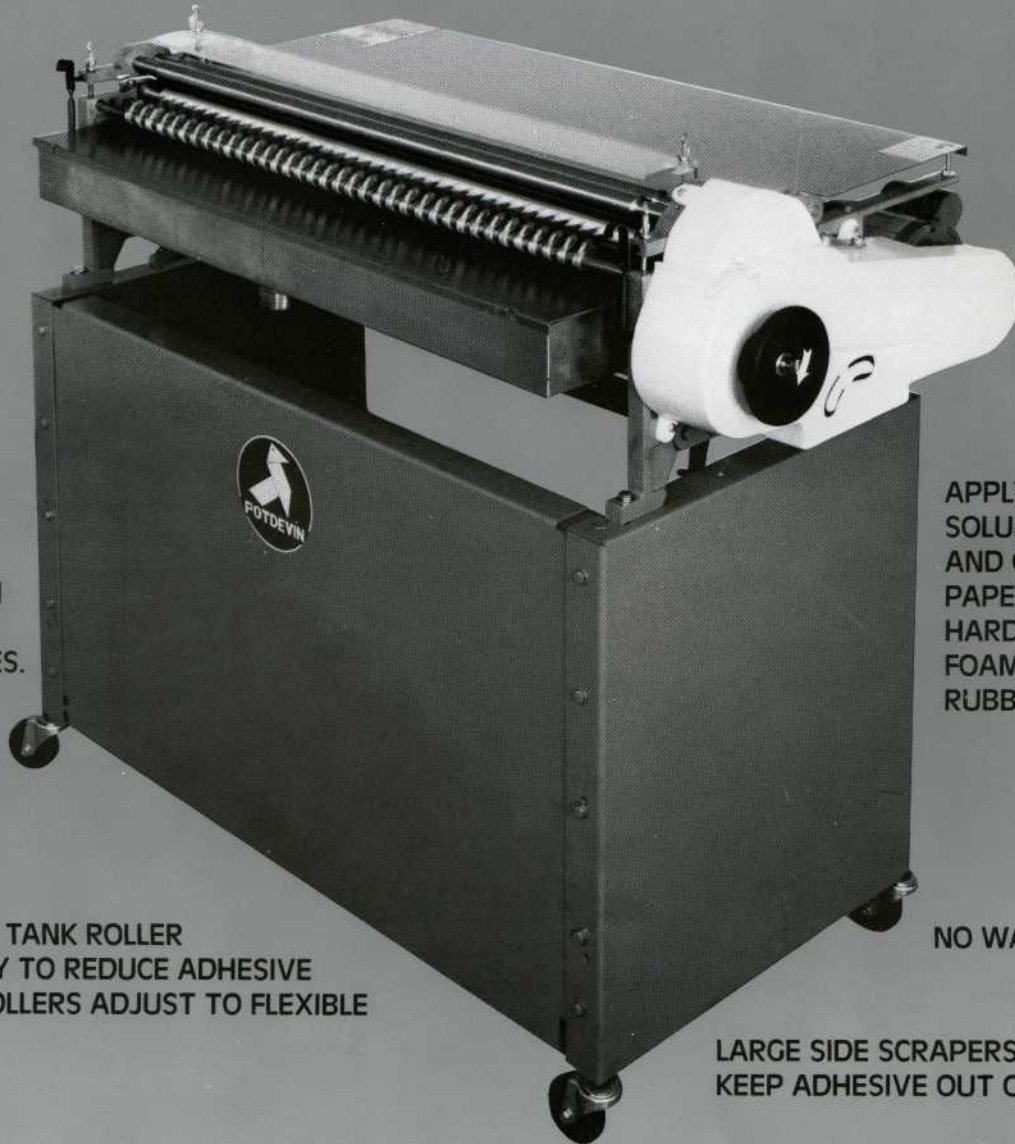

SMALL DIAMETER  
COATING ROLLER  
APPLIES UNIFORM  
COATING TO BOTH  
UNEVEN AND  
SMOOTH SURFACES.

APPLY WATER  
SOLUBLE ADHESIVES  
AND COATINGS TO  
PAPER, LEATHER,  
HARDBOARD, PLASTIC,  
FOAM, WOOD,  
RUBBER & FABRIC.

RUBBER COVERED TANK ROLLER  
REVOLVES SLOWLY TO REDUCE ADHESIVE  
FOAMING. FEED ROLLERS ADJUST TO FLEXIBLE  
OR RIGID.

NO WASTE — NO MESS

LARGE SIDE SCRAPERS  
KEEP ADHESIVE OUT OF BEARINGS.



YOU CAN PRODUCE COATED PARTS WITH THE POTDEVIN NTZ GLUER. THE REGULATOR DIAL CONTROLS THE FILM THICKNESS OF THE ADHESIVE. JUST SET DIAL FOR THE REQUIRED COATING THICKNESS. THE REMOVABLE ADHESIVE TANK MEANS LESS CLEAN UP TIME.



## Potdevin Machine Company



26 Fairfield Place, West Caldwell, NJ 07006  
Tel: 201-288-1941 Fax: (201) 288-3111  
Website : [www.potdevin.com](http://www.potdevin.com)

Pro Pack Solutions, Inc.  
(404) 292-7080 or  
(800) 274-0123

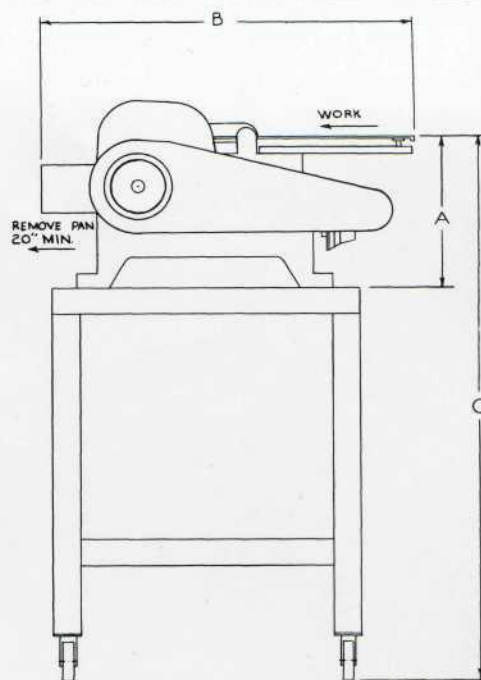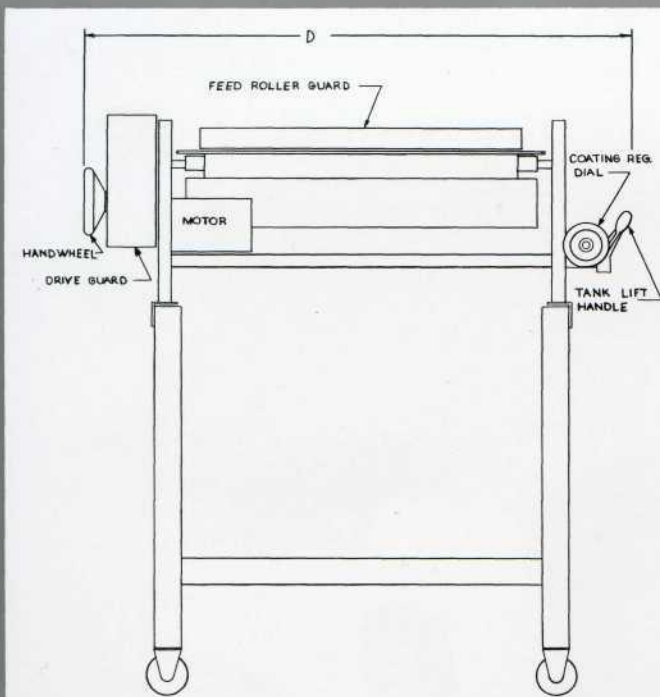

**NTZ MACHINE SPECIFICATIONS**

MODEL	ROLLER WIDTH INCHES	DIMENSIONS INCHES				TANK CAP QUARTS	NET WEIGHT POUNDS	GROSS WEIGHT POUNDS	STAND WEIGHT POUNDS
		A	B	C	D				
NTZ-27	27	12	25	41	43	11	200	250	60
NTZ-32	32	12	25	41	48	12	240	300	60
NTZ-36	36	12	25	41	52	13	280	340	65

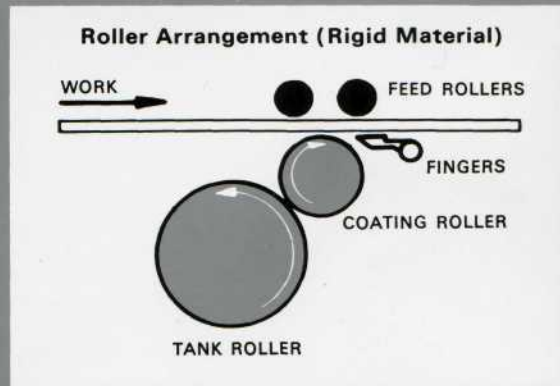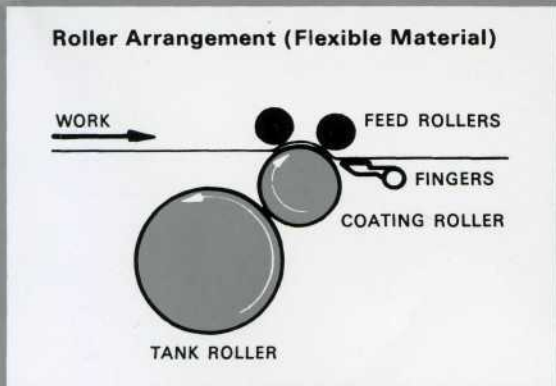

**COATING ROLLER SPEED 85 F.P.M.  
MOTOR DRIVE**

**OPTIONAL ATTACHMENTS AVAILABLE**

1/3 hp 115 or 220 Volt, 60 Hz.,  
1 phase AC Motor is standard.

STAINLESS STEEL TANK ROLLER  
EDGE AND STRIP GLUING ATTACHMENT

MOTORS WITH OTHER ELECTRICAL  
CHARACTERISTICS ARE AVAILABLE  
ON REQUEST

115 OR 220 Volt  
VARIABLE SPEED DRIVE  
PORTABLE FLOOR STAND

**Pro Pack Solutions, Inc.**

FLOOR STAND AS SHOWN

(404) 292-7080 or  
(800) 274-0123